

# Unite DS-4/2

Desktop Charger



Unite DS-4/2 – Front view



Unite DS-4/2 – Rear view



Unite DS-4/2 with Unite transmitters and receivers (not included in the delivery)

## FEATURES

- Desktop charger for Unite transmitters and receivers with 4 charging compartments – 2 of them are compatible with the Unite TH handheld transmitter
- Power on indicator
- 12 V DC connection for power supply unit

## TECHNICAL SPECIFICATIONS

### Power supply unite

#### XP Power VET36US120C2-JA for Unite DS-4/2

AC input	90 - 264 V, 47 - 63 Hz
Nominal current	0.8 A @ 100 V AC
Power consumption	25 W with 4 charging compartments
Output voltage	12 V DC, 3 A

### Charger

Max. charging time	approx. 4 hrs.
Temperature range	
in operation	0 to +30 °C
storage	-20 to +50 °C
Relative air humidity	0 to 90%
Dimensions (W x H x D)	
incl. rubber pads	147.5 x 75.5 x 78.5 mm
Weight	530 g
Charging compartments	4 of which are 2 combined charging compartments for handheld / bodypack devices

## APPLICATIONS

The Unite DS-4/2 desktop charger is used for charging the batteries integrated in the in the Unite transmitters and receivers.

The desktop charger can be attached to a table top via two holes at the bottom.

The Unite DS-4/2 desktop charger provides a maximum of 4 charging compartments, 2 of them are compatible with the Unite TH handheld transmitter. The charging state of the batteries is displayed via the status indicator on the appropriate transmitter or receiver.

## VERSION

Unite DS-4/2	Cockpit desktop charger for a maximum of 4 Unite bodypack transmitters / receivers. 2 of the 4 charging compartments are compatible with the Unite TH handheld transmitter. Incl. power supply unit . . Order # 717916
--------------	--


## SUPPLIED ACCESSORIES

- XP Power VET36US120C2-JA power supply unit
- Quick start guide

# Unite DS-4/2

## DIMENSIONS

### Power supply unit

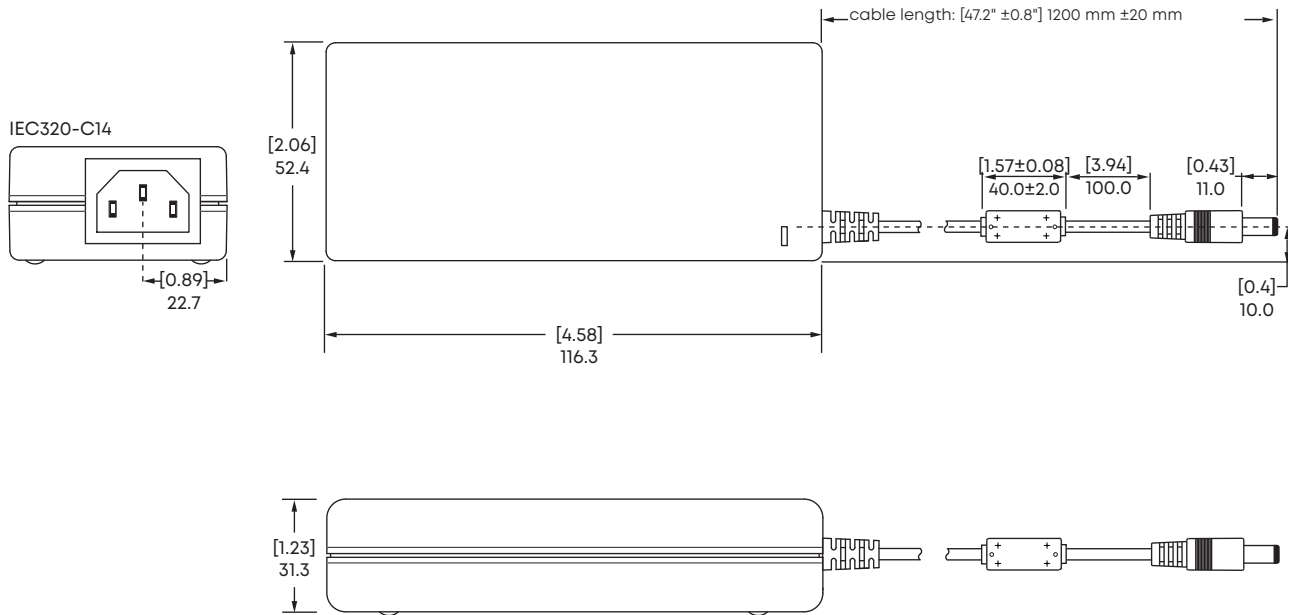

All dimensions in mm and [inch].

2 of 6

beyerdynamic GmbH & Co. KG  
Theresienstr. 8 · 74072 Heilbronn – Germany  
Tel. +49 (0) 71 31 / 617 - 300 · info@beyerdynamic.de · www.beyerdynamic.com


For further distributors worldwide, please go to [www.beyerdynamic.com](http://www.beyerdynamic.com)  
Non-contractual illustrations. Contents subject to change without notice. E1 / Unite DS-4/2 (02.20)

**beyerdynamic**

# Unite DS-4/2

## DIMENSIONS

Charger with Unite devices

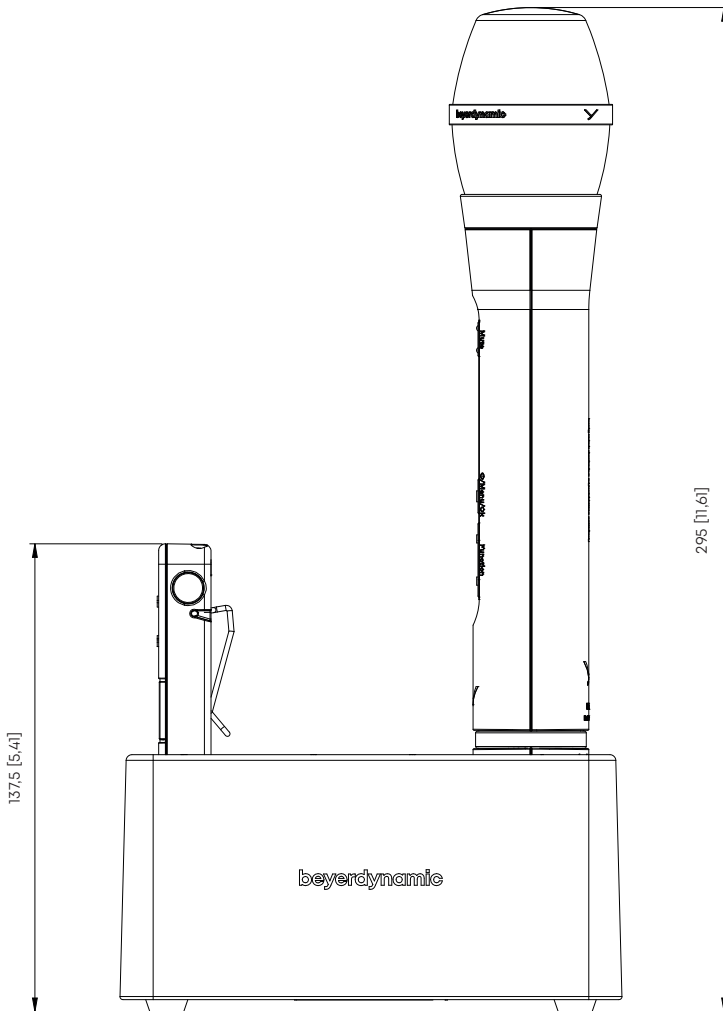

All dimensions in mm and [inch].

3 of 6

beyerdynamic GmbH & Co. KG  
Theresienstr. 8 · 74072 Heilbronn – Germany  
Tel. +49 (0) 71 31 / 617 - 300 · info@beyerdynamic.de · www.beyerdynamic.com


For further distributors worldwide, please go to [www.beyerdynamic.com](http://www.beyerdynamic.com)  
Non-contractual illustrations. Contents subject to change without notice. E1 / Unite DS-4/2 (02.20)

**beyerdynamic**

# Unite DS-4/2

## DIMENSIONS

Charger without devices

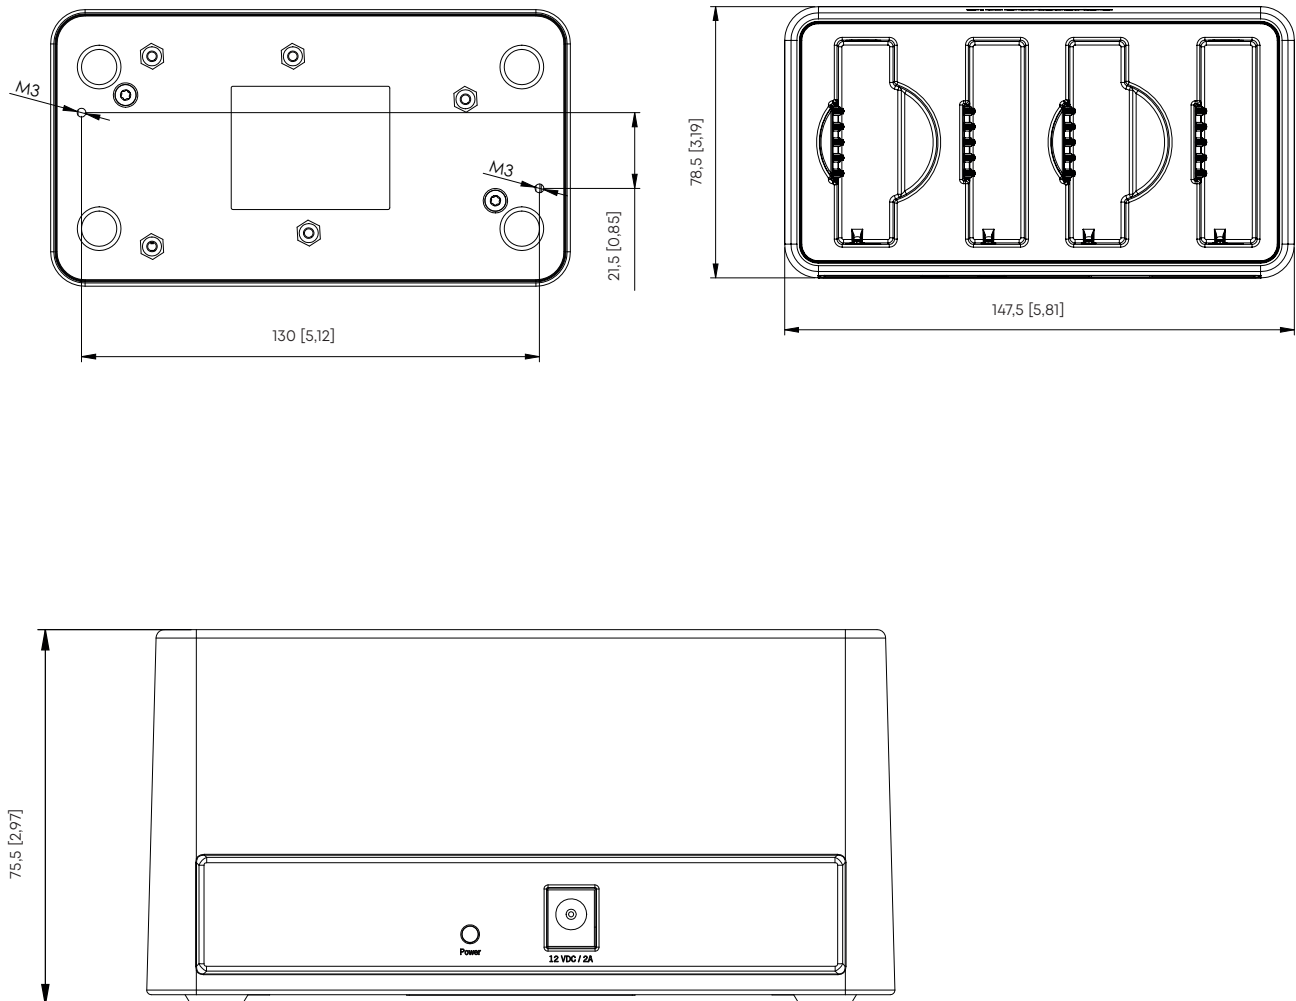


All dimensions in mm and [inch].

# Unite DS-4/2

## DRILLING TEMPLATE

**Bottom** view of the device. Outer edges are the external dimensions of the charger. The template is rotationally symmetrical. Scale 1 : 1

Rear of the device (connections)

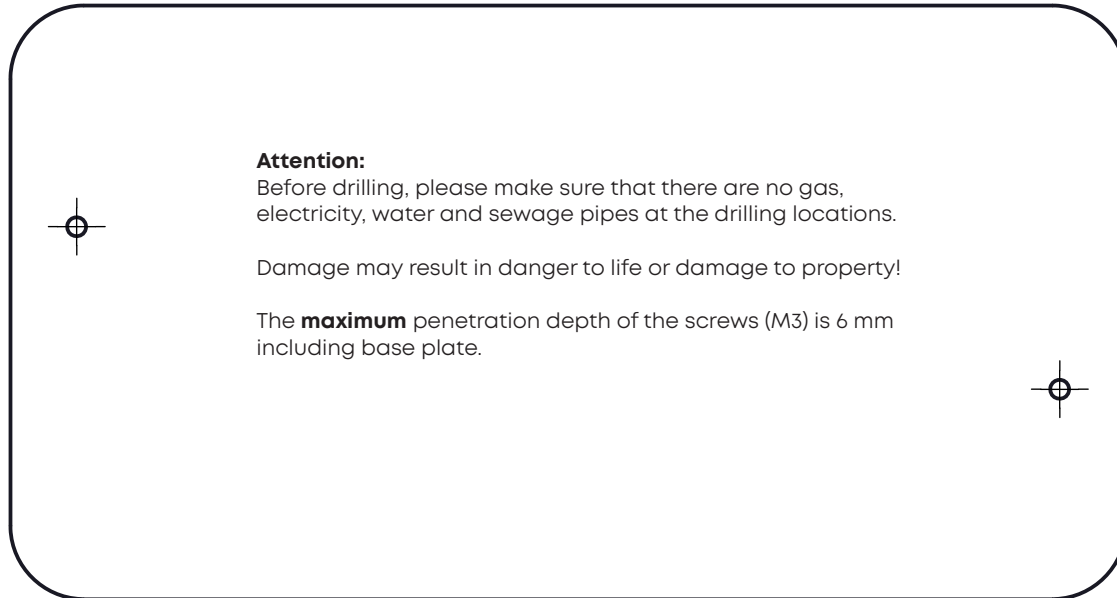

# Unite DS-4/2

## DRILLING TEMPLATE

**Top** view of the device. Outer edges are the external dimensions of the charger. The template is rotationally symmetrical. Scale 1 : 1

Rear of the device (connections)

