

Square Dual Trim Ring Installation Guide

Package contents

- Square Dual Trim Ring (5)
- M2.2 × 6 mm thread-forming screws (44)

Introduction

The Control4® Square Dual Trim Ring Kit allows two Control4 square-style devices to be installed in a horizontally mounted, dual EU-style wall box.

Supported Control4 devices

The following Control4 devices can be used with the Square Dual Trim Ring:

- C4-SKC Square Wireless Configurable Keypad
- C4-SKCB Square Configurable Wired Keypad
- C4-SAPD240 Square Adaptive Phase Dimmer
- C4-SSW240 Square Switch

Supported wall box types

The Square Dual Trim Rings are designed for use with European-style dual wall boxes, mounted in a horizontal (side-by-side) configuration. The wall boxes must have screw mount holes for attaching devices, either:

- One screw hole at each end (131 mm apart on center) with two additional screw holes near the middle (60 mm apart on center for each device)
-OR-
- Two screw holes on top and two on bottom (70 mm apart on center horizontally and 60 mm apart on center vertically).

- ✓ **Important:** The Square Dual Trim Ring will not work with wall boxes that are mounted vertically (where one device would be above the other one) or with wall boxes that do not have screw holes for mounting.

Installing

- ✓ **Important:** Refer to the installation guides for the specific Control4 devices being installed for complete device installation information, including wiring diagrams.

MOST RECENT VERSION




Control4

control4.com | 888.400.4070

To install the Square Dual Trim Ring and Control4 square devices in a wall box with mounting screw holes at the *sides* and *middle*:


- 1 Align the Control4 devices and the trim ring as shown below. The orientation arrows on the trim ring and device should face outward and point up.

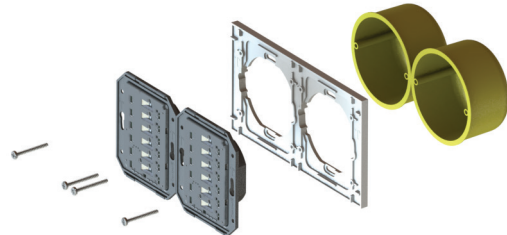

- 2 Pull the wires through the trim ring and connect to the Control4 device as described in the installation guide for the specific Control4 device being installed.
- 3 Fasten the dimmer and trim ring to the wall box using either the M3.0 thread-forming screws included with the Control4 device or the screws that came pre-installed in the wall box. Note that some pre-installed screws may not be long enough or have large enough screw heads to securely hold the device.

To install the Square Dual Trim Ring and Control4 square devices in a wall box with mounting screw holes at *top* and *bottom*:

- 1 Align the trim ring to the wall box as shown below. The orientation arrows should face outward and point up.

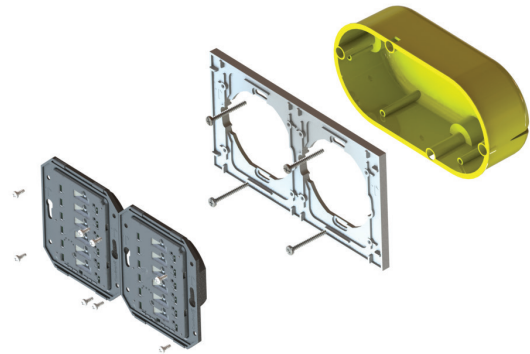

- 2 Attach the trim ring to the wall box using either the M3.0 thread-forming screws included with the Control4 device or the screws that came pre-installed in the wall box. Note that some pre-installed screws may not be long enough or have large enough screw heads to securely hold the device.
- 3 Pull the wires through the trim ring and connect to the Control4 device as described in the installation guide for the specific Control4 device being installed.
- 4 Attach the Control4 device to the trim ring using the supplied M2.2 × 6 mm screws.