

CAT6/6A UTP 180° KEYSTONE JACK 110 STYLE, TOOLLESS, W/6 COLOR ID, 568B WIRING LABEL, ANSI/TIA 568-D.2, ISO/IEC 11801 CLASS E, EA, UL - 1 EA/BAG

SCP PART#: **KJ180U-CAT6/6A-WT**
KJ180U-CAT6/6A-BK

PRODUCT SUMMARY

For High-Bandwidth Networks Using Cat6a UTP and Cat6 UTP Cabling

Toolless Design for Fast and Easy Terminations
 10GBaseT; ANSI/TIA 568.2-D; ISO/IEC 11801 Class Ea, E
 PoE IEEE 802.3bt Type 4 Compliant

KEY FEATURES

- Interchangeable (6) Color Coded Snap-On Bars
- Narrow Design Supports Side-by-Side Installation in Patch Panels
- Enhanced Crosstalk (AXT) Cancellation
- Wire Layout Diagram Simplifies Termination and Reduces Untwisting of Cable Wires
- Supports both Cat6a UTP and Cat6 UTP Cabling
- Toolless Design Requires No Punchdown or Specialty Tooling
- 180° Degree Design is Ideal for Patch Panel Applications
- UL Listed
- Professional Quality

PRODUCT DIMENSIONS

SIZE: 1.4" L x 0.8" H x 0.6" W
 36.74mm L x 21.64mm H x 17.01 mm W

SPECIFICATIONS


Standards:
 ISO/IEC 11801 Class Ea, E
 ANSI/TIA 568.2-D
 ANSI/TIA 1096-A
 ANSI/TIA 606-C
 EN 50173
 IEC 60603-7-51
 PoE/PoH: IEEE 802.3bt Type 3, 4
 UL 1863, cULus Listed

Electrical:
 Insulation Resistance: >=500 MΩ
 Dielectric Withstand Volt: 100VAC
 RMS 60Hz
 Contact Resistance: <=20mΩ
 Current Rating: 1.5A at 68F

Mechanical:
 23AWG Wire Conductors – Cat6a UTP; Cat6 UTP cabling
 Plug Insertion Life: >=750 times plug in
 Contact Force 99.2g (3.5oz) FCC Plug
 Plug Retention Force: 30lb (133n/13/3kg)
 Temperature (Installation): -40F to 150F (-40C to 66C)
 Temperature (Operating): -10C to 60C
 Contact Plating: 50μ 24ct gold

CONFIGURATION

Part #	Description
KJ180U-CAT6/6A-WT	Cat6/6A UTP 180° Keystone Jack 110 Style, Toolless - White
KJ180U-CAT6/6A-BK	Cat6/6A UTP 180° Keystone Jack 110 Style, Toolless - Black

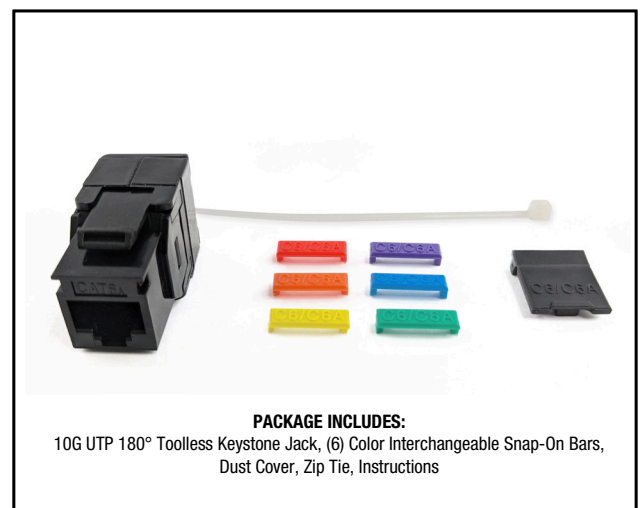

PACKAGE INCLUDES:
 10G UTP 180° Toolless Keystone Jack, (6) Color Interchangeable Snap-On Bars, Dust Cover, Zip Tie, Instructions